



DK SERIES

# DK752DN5


75" 4000 nits UHD Dual-sided Outdoor Kiosk

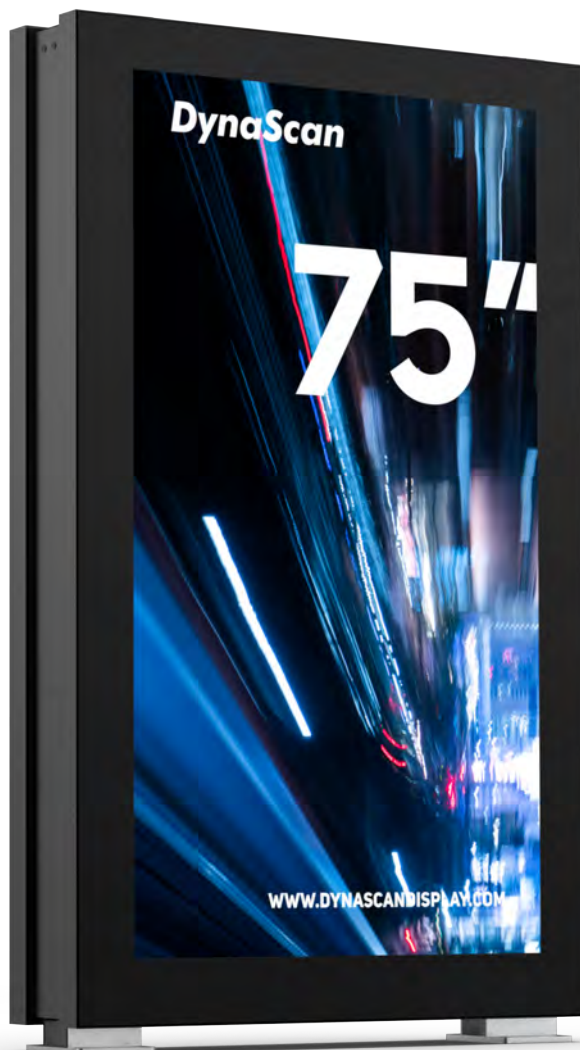

DUAL-SIDED  
DESIGN



SUNLIGHT  
VIEWABLE IMAGE



LOW POWER  
CONSUMPTION



VIEWABLE WITH  
POLARIZED LENSES



WEATHER  
PROOF

## FOR MORE INFORMATION

For more information about DynaScan, visit our website at [www.dynascan.com](http://www.dynascan.com). Copyright © DynaScan Technology Inc. All rights reserved.  
All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

# DynaScan


V1.01

# SPECIFICATION

<b>MODEL</b>	DK752DN5	
<b>DISPLAY</b>	LCD Panel Size	74.52" inches LCD (x2)
	Native Resolution	3840 x 2160
	Brightness	4,000 nits
	Light Lifetime (Typ.)	100,000 hrs
	Contrast Ratio	3000 : 1
	Color Depth	10 bits
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
	Polarized Sunglasses Support	Yes
<b>POWER</b>	Touch Function (Optional)	P-Cap touch
	Power Supply	Internal
	Rated Voltage	200-240V ~ 50/60HZ
<b>MECHANICAL SPECS</b>	Power On Mode (Typ./ Max)	650W / 1635W
	Bezel Width (T/B/L/R)	97.6 / 137.6 / 122.1 / 122.1 mm
	Cabinet Color	Black
	Dimension (LxHxD, w/o stand)	1175.7 x 1893.0 x 250.0 mm
	Weight	410 kg
	Orientation	Portrait
	Reserved Space for Optional Player	Yes
	High Security Lock	Yes
<b>USER INTERFACE</b>	Language	English
	Support SNMP (Up to V3.0)	Yes
	Local Dimming Control	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	Backup Player Build-in	Yes
<b>INPUT</b>	HDMI	x6 (2160p)
	USB 3.0	x2
	Micro SD Slot	x2
<b>OUTPUT</b>	Audio	x2
<b>EXTERNAL CONTROL</b>	RS-232	In x2
	RJ-45	x4 (LAN)
<b>INTERNAL PLAYER</b>	Operating System	Android 11.0
	Processor	Cortex-A73
	Clock Speed	1.8GHz
	Main Memory Interface	DDR4, 4G
	Graphics	Mali-G52
	Storage	16GB eMMC Flash External: Support Micro SD , Up to 128GB(FAT32/NTFS)
<b>ENVIRONMENT</b>	Multimedia	4K 10bits VP9/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	Operating Temperature	-30° C ~ 50° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 100% RH Non-condensing
<b>CERTIFICATION</b>	Environmental Rating	IP56 / IK10 / ASTM G155
	CE / FCC / UL / ROHS	
<b>OPTIONAL ITEMS</b>	Anti-Graffiti Paint	
	TCC HW Design pre-installed	
	SDM Slot pre-installed	

# DIMENSIONS

Unit: mm [inch]

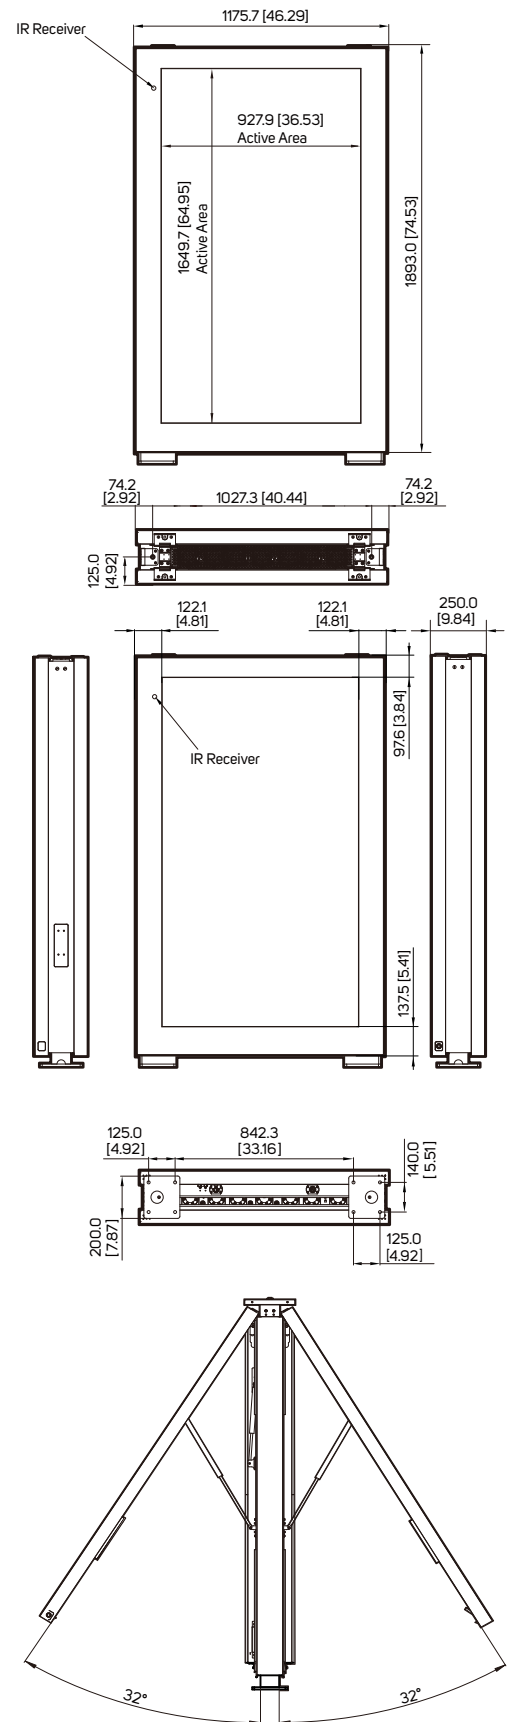

## FOR MORE INFORMATION

For more information about DynaScan, visit our website at [www.dynascan.com](http://www.dynascan.com). Copyright © DynaScan Technology Inc. All rights reserved.  
All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

**DynaScan**