


DS SERIES

DS752LR4

75" Ultra HD High Brightness 3,500 Nits Digital Signage



SUNLIGHT
VIEWABLE IMAGE




4K UHD
RESOLUTION



LED BACKLIT WITH
LOCAL DIMMING



BUILT-IN
MEDIA PLAYER



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



DynaScan

SPECIFICATION

MODEL	DS752LR4		
PANEL	LCD Panel Size	74.52 inches LCD	
	Native Resolution	3840 x 2160	
	Backlight	LED	
	Default Color Temperature	D65 (6500 K)	
	Brightness	3,500 nits	
	Color Depth	10 bits	
	Contrast Ratio	3000 : 1	
	Response Time (Typ.)	8 ms	
	Viewing Angle	178° / 178°	
	Light Lifetime (Typ.)	100,000 hrs	
POWER	Blackening Defect Free	Up to 110°C (230°F)	
	Polarized Sunglasses Support	Yes	
	Panel Surface	AG Haze 3%, 2H	
	Power Supply	Internal	
	Rated Voltage	100-240V ~ 50/60Hz	
	Power On Mode (Typ./ Max)	420 W / 800 W	
	Power Saving Mode	< 1W	
	AC out	< 100 W	
	MECHANICAL SPECS	Bezel Width (T/B/L/R)	17.0 / 17.0 / 16.5 / 16.5 mm
		Cabinet Color	Black
Monitor Dimension (LxHxD)		1688 x 967.5 x 94.2 mm	
Monitor Weight		60 kg	
Orientation		Portrait / Landscape	
VESA Mounting (LxH)		800 x 400 mm	
Carring Handles		Yes	
USER INTERFACE		Language	English
		Support SNMP (Up to V3.0)	Yes
		Proof of Image Retention	Yes
	Ambient Light Sensor	Yes	
	Power On/Off Scheduling	Yes	
	Internal Temperature Sensor	Yes	
	OSD Menu Rotation	Yes	
	INPUT	HDMI	x2 (2160p)
		Display Port	x1
		USB	x1 (For Internal Player), x1 (Service Port)
OUTPUT	SD Slot	x1	
	Audio	x1	
EXTERNAL CONTROL	RS-232	In x1, Out x1	
	RJ-45	x1 (LAN)	
INTERNAL PLAYER	Operating System	Android 7.1.2	
	Storage	Internal: 8GB eMMC Flash External: Support SD , Up to 32GB	
	Multimedia	4K 10bits H265/H264 video decoders 1080P other video decoders (VC-1, MPEG-1/2/4, VP8) 1080P video encoder for H.264 and VP8	
	Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz	
ENVIRONMENT	Operating Temperature	0° C ~ 45° C	
	Storage Temperature	-20° C ~ 60° C	
	Humidity	10% ~ 80% RH Non-condensing	
CERTIFICATION	CE / FCC / RoHS		

DIMENSIONS

Unit: mm [inch]

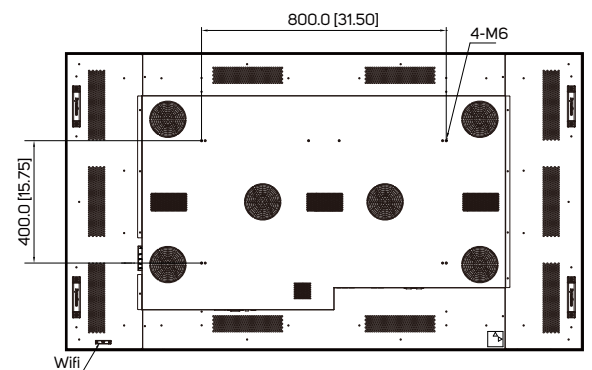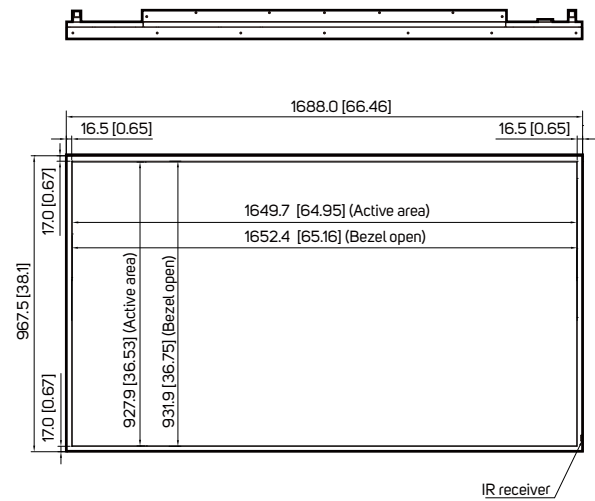

INTERFACE

